

ROLLED-SIDE SUPER HI-LITE



# Ag Trailer

## Rolled-Side Super Hi-Lite

Aluminum Live Bottom Trailer



Single hydrostatic drive with 48" belt and tandem axle configuration shown with knife gate and other options.



ROLLED-SIDE SUPER HI-LITE




# “Rolled-Side” Super Hi-Lite

The Trail King live bottom “Rolled-Side” Aluminum Super Hi-Lite ag trailer features a durable design for safe, convenient horizontal discharge of high-volume lightweight ag products. Easy to operate, the “Rolled-Side” offers efficient modern hauling helping you build a better bottom line! 48" or 64" floor widths available in tandem, tri-axle and other axle configurations.



**Top-Hinged Hydraulic Tailgate,** with knife gate and detachable grain hopper options.

**Rolled-Side Design** with protective liner that improves payload discharge.

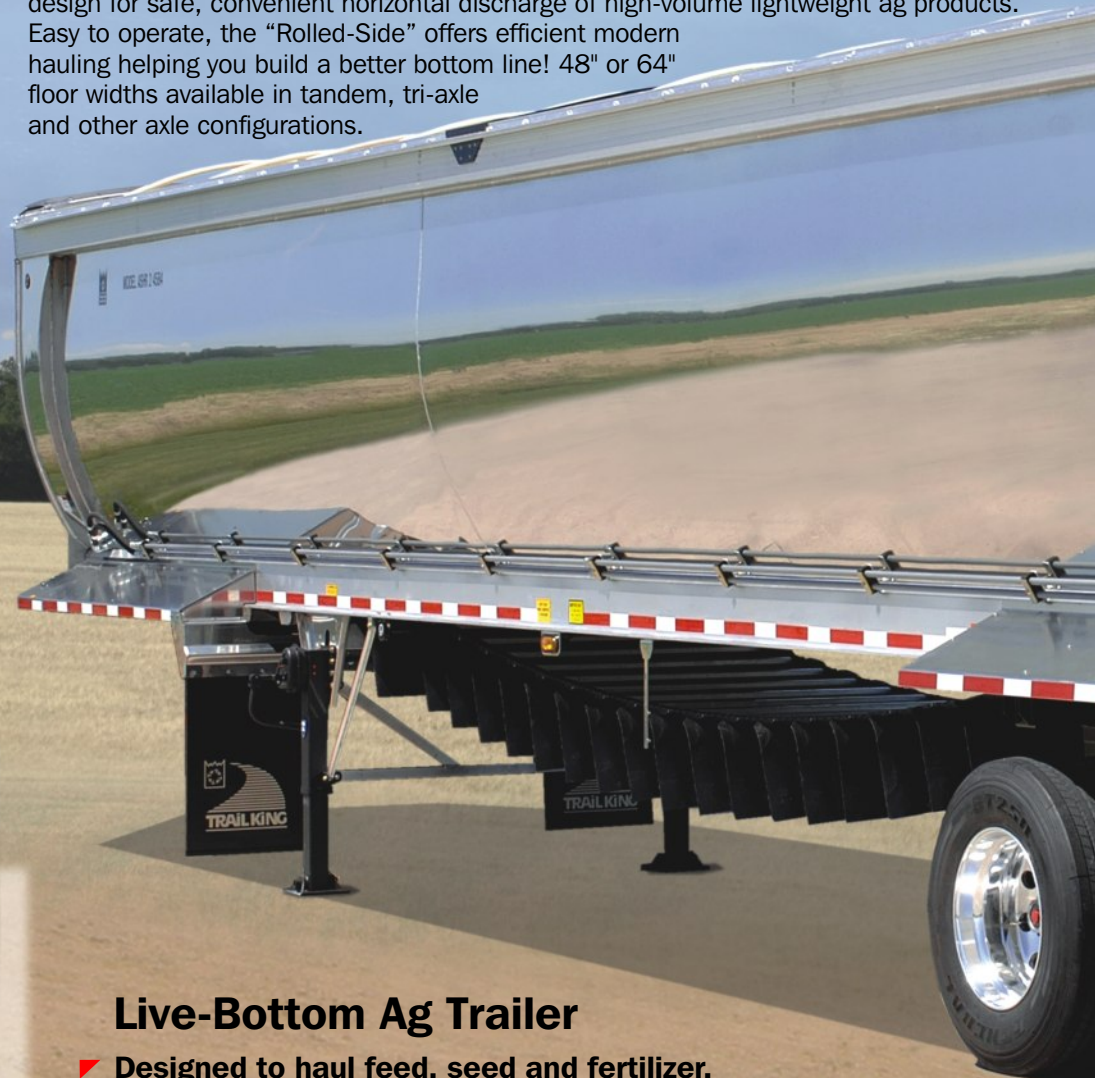

## Live-Bottom Ag Trailer

- **Designed to haul feed, seed and fertilizer.**
- **Clean and efficient horizontal discharge.**
- **Light weight smooth side aluminum design.**



**Tarp System,** (optional) available with manual or electric operation.

**Aluminum Body,** (standard) with aluminum front and rear fenders.



**Two-Speed Landing Legs,** (standard).



**Manual Lever Controls,** (standard) Electric/Manual with remote (optional).

**Variable Rate of Discharge.** Rear-mounted flow control valve.

1-800-762-5557

**Efficient  
Smooth Side  
Design**



**Live Bottom Floor** with aluminum cross tubes and chain-driven belt segments of 2-ply rubber.

**Segmented Rubber Belt**, in 48" or 64" widths.



**Drag-Style Pintle Chain** – heavy duty and easy to maintain.



**Direct Hydrostatic Drive** with double reduction planetary gearbox... single or dual drive depending upon belt width and payload requirements.



Shown with dual drive 64" belt configuration and options.



**Various axle configurations**  
– and capacities are available.

**Rear Deflection Shield & Bumper**,  
(optional).



**Top Hinged Door**, (standard).



# "Rolled-Side" Super Hi-Lite Live Bottom

- **Designed to haul feed, seed, and fertilizer.** Sturdy aluminum for light weight.
- **Fast, clean horizontal discharge** in one revolution or less.
- **No worries** about overhead wires, limited clearance or uneven terrain. Live-bottom horizontal rear discharge eliminates tipping concerns.

**Efficient  
Rolled-Side  
Design**



## Specifications\* Tandem Models

Model	4272-48	4278-48	4284-48	4296-48	4202-48	4672-48	4678-48	4684-48	4696-48	4602-48
Capacity (cu.yds.)	57	63	69	81	87	63	69	75	87	93
Overall length	43'	43'	43'	43'	43'	47'	47'	47'	47'	47'
Body length	42'	42'	42'	42'	42'	46'	46'	46'	46'	46'
Overall height	10'4"	10'10"	11'4"	12'4"	12'10"	10'4"	10'10"	11'4"	12'4"	12'10"
KP to last axle	37'4"	37'4"	37'4"	37'4"	37'4"	41'4"	41'4"	41'4"	41'4"	41'4"
Weight (lbs.)	12,230	12,430	12,630	13,230	13,380	12,720	12,935	13,150	13,675	13,835

Model	4872-48	4878-48	4884-48	4896-48	4802-48	5272-48	5278-48	5284-48	5296-48	5202-48
Capacity (cu.yds.)	65	72	79	93	100	71	78	85	99	106
Overall length	49'	49'	49'	49'	49'	53'	53'	53'	53'	53'
Body length	48'	48'	48'	48'	48'	52'	52'	52'	52'	52'
Overall height	10'4"	10'10"	11'4"	12'4"	12'10"	10'4"	10'10"	11'4"	12'4"	12'10"
KP to last axle	43'4"	43'4"	43'4"	43'4"	43'4"	47'4"	47'4"	47'4"	47'4"	47'4"
Weight (lbs.)	12,990	13,225	13,460	14,015	14,185	13,480	13,730	13,980	14,570	14,750

\*All dimensions are approximate. Specifications are subject to change without notice. Trailers in this brochure may picture optional equipment.

## Standard Features

- 48" live floor: 2-strand drag chain with belt segments
- Direct hydrostatic drive
- Planetary gearbox and motor
- Top-hinged hydraulic tailgate
- Rear manual controls
- Aluminum body with aluminum front & rear fenders
- (8) 22.5 x 8.25 10-hole hub piloted disc type wheels
- (8) 11R22.5 14 ply radial tires
- 3 leaf spring suspension
- Anti-lock brake system
- 2-speed landing gear
- 1/4" UHMW floor plastic
- 3/16" HMW wall plastic (up to 84" model)

Distributed by:



# TRAIL KING Industries

ROLLED-SIDE SUPER HI-LITE