



STANDARD FEATURES

A BETTER ANGLE

FOR BETTER PERFORMANCE.

11° TILT

Safety Chains

Heavy-duty safety chains with GVWR-rated grab hooks are built tough for years of dependable service.

Drop Leg Jack

Bolt-on 12,000-lb jack with drop leg.

Heavy-Duty Bent D-Rings

Forged D-rings for your trailer to handle even your toughest hauling requirements.

Axles, Tires, Fender

Torflex axles, 8-hole wheels, and radial tires deliver a smooth ride, long service life, and attractive appearance.

I-Beam Crossmembers

Full width I-beam crossmembers are used to provide maximum load bearing strength. 2-part polyurethane primer is completed prior to adding the deck to provide corrosion resistance in unseen areas.

TKTU STANDARD EQUIPMENT	TKT12U	TKT14U	TKT16U
Payload Capacity	12,000 lb.	14,000 lb.	16,000 lb.
Structural Steel Main Frame	X	X	X
Overall Width	102"	102"	102"
Deck Width between Fenders	82"	82"	82"
Overall Deck Length	20'	20'	20'
Stationary Deck Length	4'	4'	4'
Tilt Deck Length	16'	16'	16'
Loaded Deck Height	23"	23"	23"
Torflex Axles	(2) 7,000 lb.	(2) 7,000 lb.	(2) 8,000 lb.
Electric Brakes on All Axles	X	X	X
12,000 HD Jack with Spring Foot	X	X	X
4-Bolt Pintle Hitch, adjustable range	19" - 23.5"	19" - 23.5"	19" - 23.5"
6 pair Bent D-Rings: (2) on Stationary / (4) on Tilt Deck	X	X	X
14 Gauge Fenders	X	X	X
Single Disc Wheel (8-Hole)	X	X	X
Tires	235/80R x 16	215/75R x 17.5	215/75R x 17.5
1.5" Oak (Raised) Decking	X	X	X
Electrical System per DOT Regulations	X	X	X
Safety Chains with Grab Hooks	X	X	X
Headboard	X	X	X
Breakaway Switch	X	X	X
Red & White Conspicuity Markings	X	X	X
Trail King 2-Part Epoxy Primer and Urethane Top Coat Paint	X	X	X

***See your local dealer for full list of available options.**



Adjustable Hitch

Accommodate a wide variety of towing vehicles with an adjustable 4-bolt hitch rated for the full GVWR of the trailer.



Toolbox

Spacious toolbox spans the entire width of the tongue area for enough room to store all your chains and tools. Optional lockable tool box lid available.




Break-Away System

The lighted read-out break-away system monitor provides easy and convenient monitoring of the charge status.



Safety Headboard

The safety headboard provides extra dimension of safety and load-hauling security.

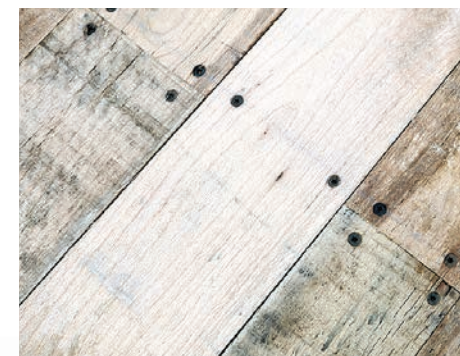

Oak Decking

All TKTU models come with 1.5" nominal oak decking that is double screwed to crossmembers to prevent cupping. This deck will stand up to years of rugged service. Optional apitong decking available.



Recessed Dot Lights

Recessed lights at the rear are long-lasting and provide improved safety and visibility.



Platform Lock

Keep your deck from accidentally tilting while in the transport mode with the platform lock mechanism and safety lock pin.



Platform Cushioning Cylinders

Single platform cushioning cylinders make loading and unloading a smooth operation.



Approach Plate

The main deck tilts to an 11° load angle, and features star traction material on the approach plate and recessed lights that are protected during the loading/unloading process.

Products shown may feature optional equipment. Available specifications are subject to change without notice.